



CDM6240s

Single cash dispenser

Description

The single cash dispenser CDM6240s of which GRGBanking possesses full independent intellectual property rights is a simplified version of the single cash dispenser CDM6240 with lower dispensing speed and maximum 3 cassettes. It is designed for low-end, low-transaction retail and non-banking sectors, but offers the same functionalities and high performance as CDM6240 while the total cost of ownership is significantly reduced.

CDM6240s

Single cash dispenser

CDM6240s single cash dispenser Module provides 4 advanced features of GRG's leading technology with all independent intellectual property rights owned by GRG.

Reliable

- Sensitive Opto-Electrical Detection delivers very good performance in detecting double notes
- High security cassettes and a separate reject tray with lock and seal-leading.
- Unique log record and inquiry function, enables to record and check the transactions of minimum three months
- **Intelligent**
- Cassette low stock detect function to ensure in time cash replenishment, leading to a maximize d uptime.
- Offline Diagnosis system makes troubleshooting very simple
- Radio Frequency Identification technique (Optional), enables to

store the cassette ID, cash loader information and loaded cash information

Flexible


- Modular design, easy to assemble and dissemble
- Front or rear service access for convenient maintenance
- onsite replacement of wearing parts
- High process speed and capacity
- Friction feed, able to handle various currencies
- dispensing at a high speed of 4 notes/ second
- Maximum 2200 notes per cassette, expandable up to 3 cassettes, 6600 notes in total

Specification



Electrical specifications

- **LMedia ranges**
- Length: 110mm ~172 mm
- Width: 55mm ~85 mm
- Thickness: 0.06mm ~0.18 mm
- Dispensing system
- Friction feed, single dispensing, 4 notes/second
- Maximum notes per transaction: 50 notes
- Low level detection: 50~250 notes (adjustable)
- Reject tray capacity: Single reject, minimum 100 notes
- Maintenance: Front/Rear
- **Note Cassette**
- Expandability: Up to 3 Cassette capacity: 2200 notes
- Security: Mechanical lock and lead sealing
- **Weight**
- 16.9 Kg, 1 cassette weight, with the increase of every cassette, the weight shall be added by 9.9kg.
- Communication interface: RS-232/ USB (optional)
- Operating environment
- Temperature: 00C~500C Humidity: 20%~90% non-condensing
- **Power supply**
- Input voltage: DC 24V, 200W Consumption: Idle 10W; Operating 50W

Dimensions

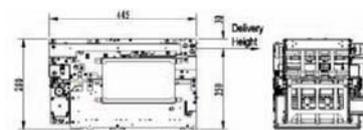

Front Service Dimensions (mm)



Rear Service Dimensions (mm)

The dimensions above are based on single cassette height, with the increase of every cassette, the height shall be added by 142.5mm.

GRG Banking Equipment Co., Ltd

Add: 9 Kelin Road, Science City, Luogang District,
Guangzhou, China 510663
Tel: +86 20 82188379/82188564
Fax: +86 20 82189024

Copyright by GRG Banking Equipment Co., Ltd.
All rights reserved@201011MD01

Specifications are subject to update without prior notice.
Please consult GRG Banking or its representative for the latest information.